




# CLIM3-SDR

3-Channel Camera Link Input Module for Annotator Pro

CLIM3-SDR is a three-channel Camera Link input module for the Annotator Pro. All Camera Link Base functions are supported on all three channels, including all data bits.

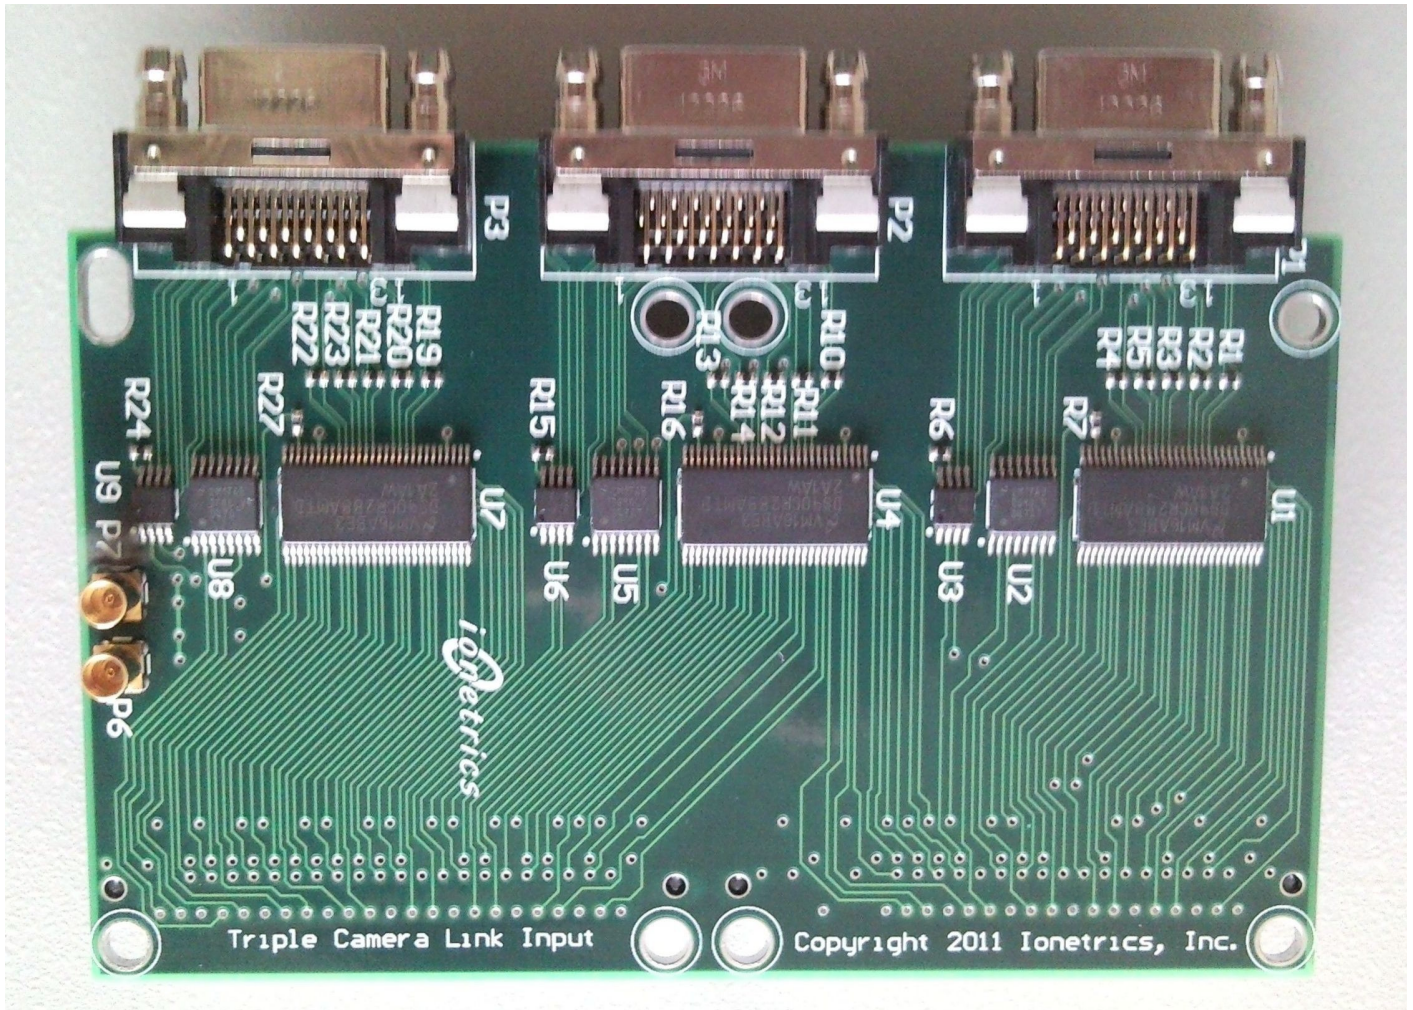

- Features**
- Uses the DS90CR288A Channel Link receiver on each channel
  - SDR connectors (Mini Camera Link) on each channel
  - Supports Camera Link Base with pixel clock frequencies between 20 MHz and 85 MHz
  - Includes support for all data bits, FVAL, LVAL, DVAL, CC1, CC2, CC3, CC4, and the camera serial interface
  - User programmable outputs on P6 and P7
  - No restrictions on frame size or frame rate

**Interface** CLIM3-SDR can be installed on the Annotator Pro at either P14/P15 or P16/P17

**Dimensions** 64 x 94.4 mm

**Part Number** CLIM3-SDR

**Price** Contact us for configuration and pricing options