




CLOM3-SDR

3-Channel Camera Link Output Module for Annotator Pro

CLOM3-SDR is a three-channel Camera Link output module for the Annotator Pro. All Camera Link Base functions are supported on all three channels, including all data bits.

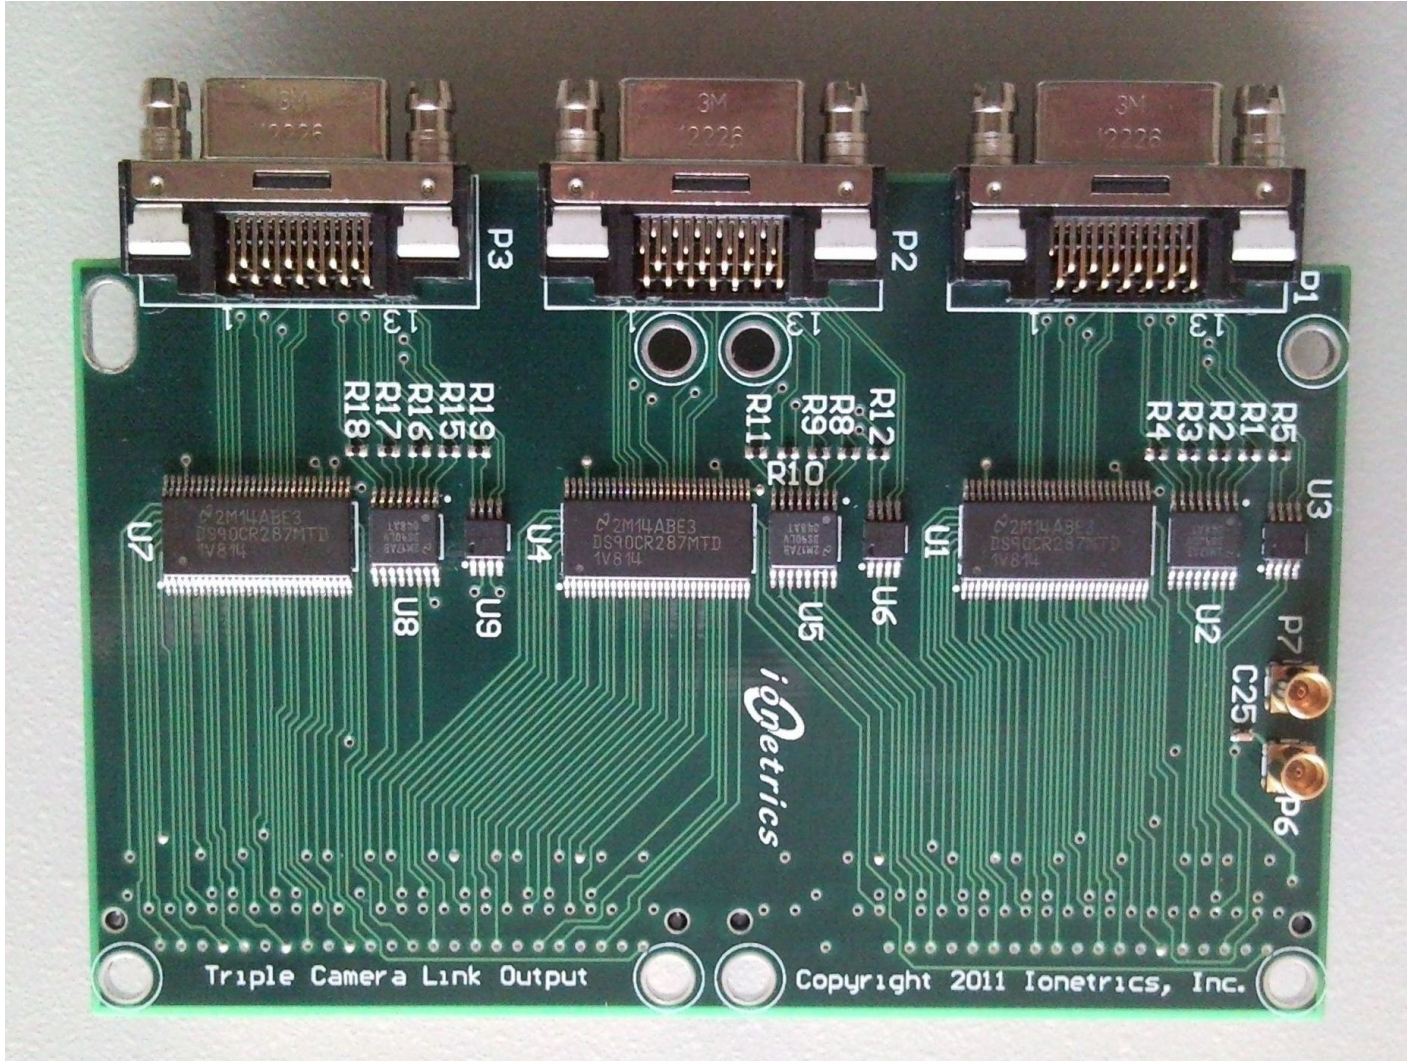

- Features**
- Uses the DS90CR287 Channel Link transmitter on each channel
 - SDR connectors (Mini Camera Link) on each channel
 - Supports Camera Link Base with pixel clock frequencies between 20 MHz and 85 MHz
 - Includes support for all data bits, FVAL, LVAL, DVAL, CC1, CC2, CC3, CC4, and the camera serial interface
 - User programmable output on P6, input or output on P7
 - No restrictions on frame size or frame rate

Interface CLOM3-SDR can be installed on the Annotator Pro at P14/P15 or P16/P17

Dimensions 64 x 94.4 mm

Part Number CLOM3-SDR

Price Contact us for configuration and pricing options