




World-Tag-20mm

Low Frequency Passive RFID Tag

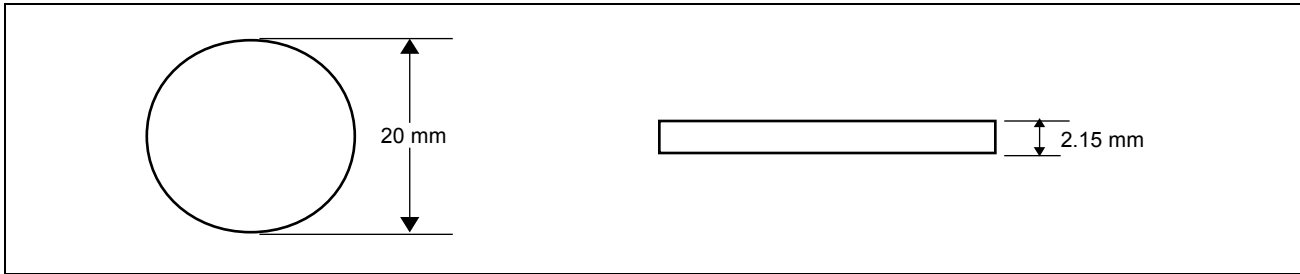

Specifications

Description	Heat and chemical resistant polycarbonate disk
Transponder	RF/64, Manchester, 64 bit read only, 40 bit serial number
Frequency	125 kHz \pm 6 kHz
Size	Diameter: 20 mm \pm 0.2 mm, Thickness: 2.15 mm \pm 0.25 mm
Material	Black polycarbonate
Weight	0.8 g
Protection	Waterproof immersion IP67 Inert to most organic solvents Axial compression: 500 N Radial compression: 300 N Vibration: IEC68-2-6 Shock: IEC 68-2-29
Temperature	Operating: -25°C to +70°C Storage: -40°C to +90°C (up to 1000 hours), +130°C (up to 100 hours)
Read Range	Reader dependent
Part Number	World-Tag-20mm
Price	\$2.75 each (minimum 10, volume pricing is available)